



JS WEAR SOLUTIONS

KCH-626-V


Product Data Sheet

Self-Shielded Flux Cored Wire for Hardfacing

Specification	DIN 8555 : MF 10-GF-60-G
Applications	It is suitable for vertical mill, screws, dredging bucketfront edges, sieves, stirrerblades, top layer for teethtips and crushing rolls
Characteristics	● Weld metal contains primary carbide and eutectic structure. ● The abrasion resistance is improved due to special carbides with ultrahigh hardness. ● Good weldability and almost no slag.
Note on Usage	● Weld metal is unable to be machined, but it can be ground if necessary. ● Preheat temperature is 150~250°C for carbon steel, low alloy steel or cast steel base metal. ● Use KCH-615-S for buffer layer.

Chemical Composition & Hardness of All Weld Metal

Specimen specification and welding parameter

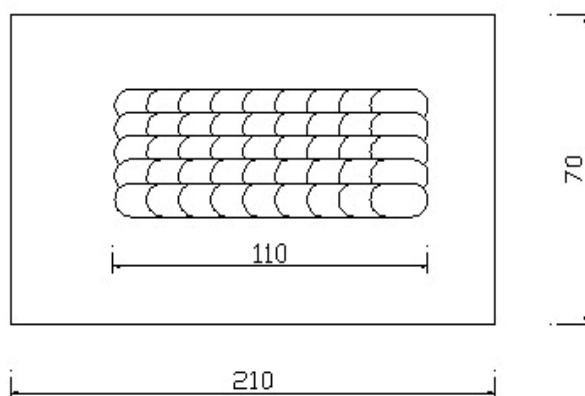

Diameter (mm)	2.8
Current (A)	300
Voltage (V)	32
Interpass	
Temperature (° C)	150±15
Shielding Gas	None
Polarization	DC(+)

- **Hardness of Weld Metal**

Layer	1	2	3
Hardness (HRC)	55~58	57~60	58~62


● **Chemical Composition of Weld Metal**

C	Si	Mn	P	S	Cr	Mo
5.2	1.4	0.2	0.016	0.009	28.25	0.85

Size and Suggested Operating Range

Size (mm)	Voltage (V)	Current (A)	ESO (mm)
2.8	28~33	350~400	40~60

Microstructure

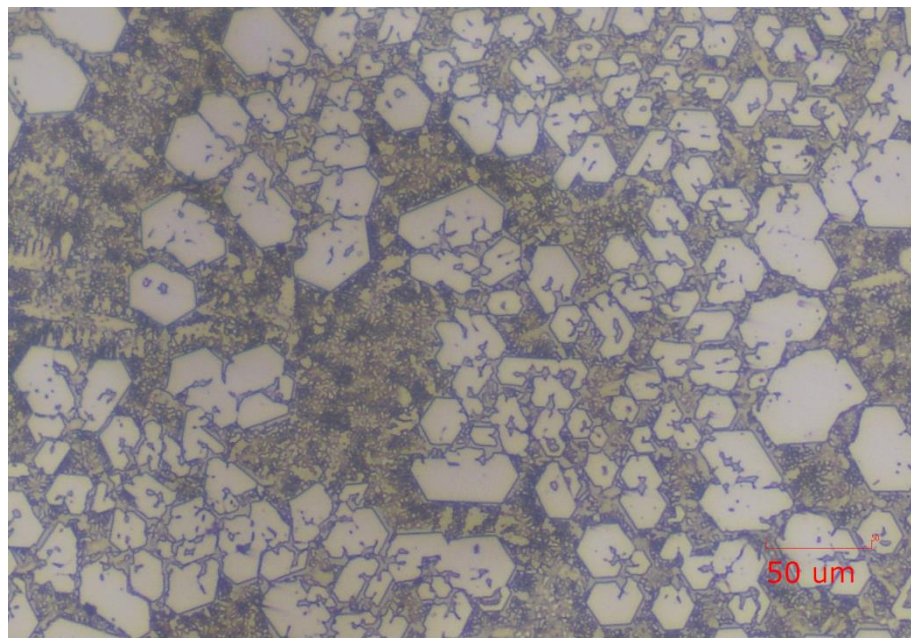

KCH-626-V produces a high amount of primary and eutectic carbides. It results in a significant improvement in wear performance.

This information is provided solely for the purpose of confirming product conformance with applicable standards. The serviceability of a product or structure utilizing this type of information is and must be the sole responsibility of the builder/user. Many variables beyond the control of JIE SHENG MACHINERY CO., LTD. affect the results obtained in applying this type of information. These variables include, but are not limited to, welding procedure, shielding gas, plate chemistry and temperature, weldment design, fabrication methods and service requirements.